


CROSS SECTION OF PILE

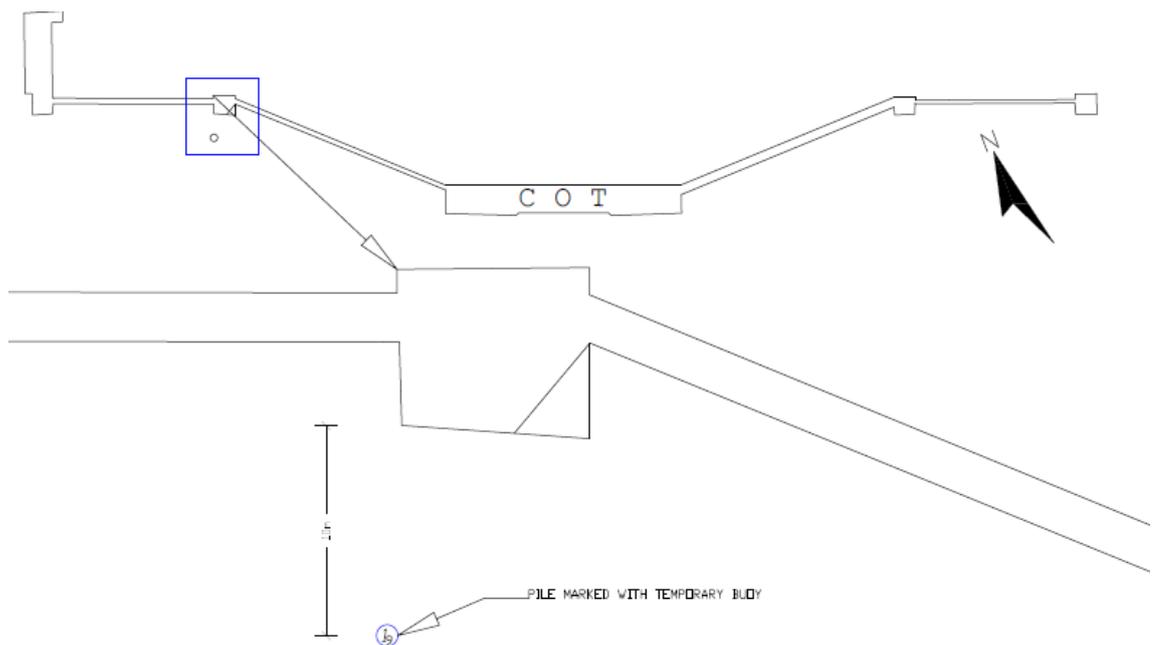

LOCATION PLAN

**Name of work : Under water cutting of tubular steel fender pile at CoT**

<b>Item No</b>	<b>Description of item</b>	<b>Unit</b>	<b>Rate (Rs.)</b>
1	Under water cutting of the existing slanting tubular steel fender pile (broco industrial cutting) in backwaters near Cochin Oil Terminal (CoT) at the existing bed level and removing with suitable methods as per the directions of the Engineer-in-charge. The tubular steel fender pile is of about 50cm dia and the existing bed level is about (-)2m CD. The removed pile materials shall be transported suitably without falling in the backwaters and all removed materials shall be the Contractor's property.	One Number	

Note:

1. The offered rates shall be inclusive of all taxes, duties and other contingencies, if any, and GST at the prevailing rate will be paid extra.
2. Rates offered shall be inclusive of mobilisation and demobilisation of all plants & equipments.
3. Electricity, if required, will be provided from the nearest point of CoT free of cost.
4. No retention money will be recovered from the payment. However, all statutory recoveries will be affected from the payment.

Name and  
Signature of Bidder